

PIPE CUTTING MACHINE

tubOcut IV

For cutting and bevelling of steel pipes with outer diameters
from 400 mm (15,7") to 1600 mm (63")




Features of the tubOcut IV

- Outstanding guidance and cutting precision
- Easy mounting and operation
- Robust and solid in construction
- Excellent cutting quality

Thus, the machine is also perfectly suited for the use on construction sites

GLOOR

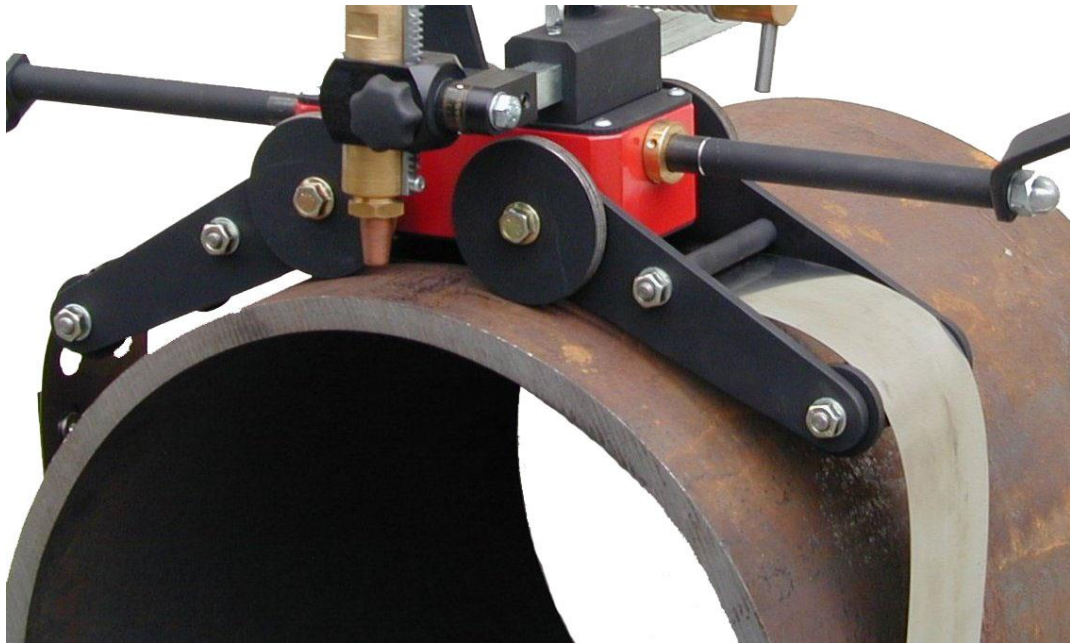

- Fast and easy mounting at the pipe by means of a guide band
- Precise centering and locking by means of a special clamping device
- Very high guidance and cutting precision through the large supporting surface of the guide band and the knurled and hardened drive wheels
- Possibility of bevel cutting up to 45° with the aid of an angle scale at the torch carrier

Scope of supply:

- steel band for pipe dia. 600 - 1000 mm
- set of block nozzles 3 - 50 mm for acetylene or propane
- nozzle cleaners
- spanner

Technical data:

Article Number	: Art. 7340
Minimum pipe diameter	: 400 mm (15,7")
Maximum pipe diameter	: 1600 mm (63")
Weight	: 9.8 kg
Cutting range	: 3 - 50 mm
Fuel gas	: acetylene or propane – please specify in your order

Steel bands for the **tubOcut IV** are available for pipe diameters

400 - 600 mm	Art. 73156
600 - 1000 mm	Art. 73239
900 - 1200 mm	Art. 73240
1200 - 1600 mm	Art. 73249

other sizes on request